


# Indoor Ambience Monitoring Sensor

Featuring LoRaWAN®

## AM300 Series

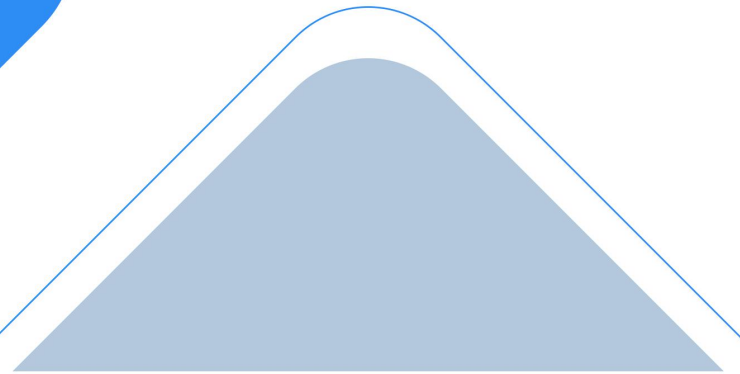

### ◆ Introduction



AM300 series is a compact indoor ambience monitoring sensor for measurement of temperature, humidity, light, CO<sub>2</sub> concentration, HCHO/O<sub>3</sub> level, TVOC, barometric pressure, PM2.5, PM10 and motion. The data will be shown on the E-ink screen in real-time, which helps to measure the indoor environment and comfort. AM300 series is widely used for offices, stores, classrooms, hospitals, etc.

Sensor data is transmitted using LoRaWAN® technology. Combining Milesight LoRaWAN® gateway and Milesight IoT Cloud, users can manage all sensor data remotely and visually.

### ◆ Features

- Integrated with multiple sensors like humidity, temperature, CO<sub>2</sub>, light, barometric pressure, PM2.5, PM10, etc.
- Multiple display modes and clear emoticon to easily understand the comfort levels via screen
- Support batteries or DC power supply
- Equipped with traffic LED and buzzer to indicate device status and threshold alarms
- Support more than 20,000 data records store locally
- Compliant with standard LoRaWAN® gateways and network servers
- Quick and easy management with Milesight IoT Cloud

## ◆ Specifications

| Model                                  | AM307   | AM319                      |
|--|---|----------------------------|
| <b>Wireless Transmission</b>           |   |                            |
| Technology                             | LoRaWAN®  |                            |
| Frequency                              | CN470/RU864/IN865/EU868/US915/AU915/KR920/AS923 |                            |
| Tx Power                               | 16dBm(868MHz)/22dBm(915MHz)/19dBm(470MHz)       |                            |
| Sensitivity                            | -137dBm @300bps                                 |                            |
| Work Mode                              | AM307: Class A<br>AM319: Class C                |                            |
| <b>Sensors</b>                         |   |                            |
| <b>Temperature</b>                     |   |                            |
| Range                                  | -40°C - 85°C                                    |                            |
| Accuracy                               | ± 1°C   |                            |
| Resolution                             | 0.1°C   |                            |
| <b>Humidity</b>                        |   |                            |
| Range                                  | 0% - 100% RH                                    |                            |
| Accuracy                               | ± 3%  |                            |
| Resolution                             | 0.5% RH   |                            |
| <b>PIR</b>                             |   |                            |
| Detection Area                         | 80 ° Horizontal, 55 ° Vertical                  |                            |
| Detection Range                        | 5 m   |                            |
| Status                                 | Vacant/Occupied                                 |                            |
| <b>Light</b>                           |   |                            |
| Range                                  | 0-60000 Lux (display as 6 levels, 0-5)          |                            |
| <b>TVOC</b>                            |   |                            |
| Range                                  | 0-500 (IAQ Index)                               |                            |
| Accuracy                               | ±15 %   |                            |
| <b>Barometric Pressure</b>             |   |                            |
| Range                                  | 300 - 1100 hPa (-40°C - 85°C)                   |                            |
| Accuracy                               | ±0.6 hPa  |                            |
| Resolution                             | 0.1 hPa   |                            |
| <b>Carbon Dioxide (CO<sub>2</sub>)</b> |   |                            |
| Range                                  | 400 - 5000 ppm                                  | 400 - 2000 ppm             |
| Accuracy                               | ±30 ppm or ±3 % of reading                      | ±50 ppm or ±5 % of reading |

|  |  |   |
|--|--|---|
| Resolution                               | 1 ppm  | 1 ppm   |
| <b>PM2.5 &amp; PM10</b>                  |  |   |
| Range                                    | —  | 0 - 1000 $\mu\text{g}/\text{m}^3$                               |
| Accuracy                                 | —  | 0-100( $\pm 10\mu\text{g}/\text{m}^3$ ), 100-1000( $\pm 10\%$ ) |
| Resolution                               | —  | 1 $\mu\text{g}/\text{m}^3$                                      |
| <b>Formaldehyde (HCHO)<sup>1</sup></b>   |  |   |
| Range                                    | —  | 0 - 6 $\text{mg}/\text{m}^3$                                    |
| Accuracy                                 | —  | $\pm 10\%$  |
| Resolution                               | —  | 0.01 $\text{mg}/\text{m}^3$                                     |
| <b>Ozone (O<sub>3</sub>)<sup>2</sup></b> |  |   |
| Range                                    | —  | 0 - 10 ppm  |
| Accuracy                                 | —  | $\pm 5\%$ FS  |
| Resolution                               | —  | 0.01 ppm  |
| <b>Display &amp; Configuration</b>       |  |   |
| Display                                  | 4.2-inch Black & White E-Ink Screen                                |   |
| Button                                   | 1 × Power Button + 1 × Reset Button                                |   |
| LED & Buzzer                             | 1 × Traffic Light Status Indicator + 1 × Buzzer                    |   |
| Configuration                            | 1. Mobile App via NFC<br>2. PC software via NFC or USB Type-C port |   |
| <b>Physical Characteristics</b>          |  |   |
| Power Supply                             | 4 × 2700 mAh ER14505<br>Li-SOCl <sub>2</sub> battery               | 5V/1A by Type-C Port  |
| Operating Temperature                    | -20°C - 60°C (E-Ink Screen: 0°C - 40°C)                            |   |
| Relative Humidity                        | 10% - 90% (non-condensing)   |   |
| Ingress Protection                       | IP30   |   |
| Dimension                                | 100.8 × 114 × 22 mm (3.97 × 4.49 × 0.87 in)                        |   |
| Installation                             | Wall Mounting  |   |

<sup>1</sup> This function is valid in the measurement of either HCHO or O<sub>3</sub>.

<sup>2</sup> O<sub>3</sub> electrochemical sensor working life is 2 years.

